

DPA616

Sixteen channel Power Amplifier


AUDAC

► Features

- Sixteen channel power amplifier
- Class-D Technology
- 16 x 60 Watt in Stereo mode
- 8 x 120 Watt in Bridge mode
- Stereo / Bridge & Parallel switch
- Euro Terminal block connectors
- Advanced Protection circuit
- 19" Mounting device

► Applications

- Public buildings
- Restaurants
- Bars
- Warehouses
- Offices

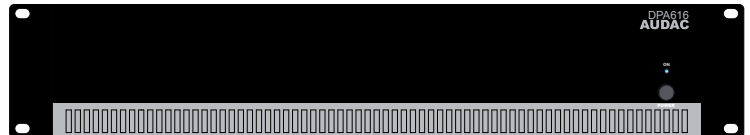

The DPA616 is a professional sixteen channel power amplifier, which is capable of delivering a power of 60 Watt to 4 Ohm loads connected to the 16 output channels. When used in bridge mode, it can deliver a power of 120 Watt to 8 Ohm loads connected to the 8 bridged outputs. This way, the DPA616 is the perfect solution for installed Multi-Zone audio distribution systems with 8 zones.

It is designed as a no-nonsense amplifier with only the necessary controls and connections, which creates great simplicity in use and installation.

The input connections are all performed with 3-pin Euro-Terminal block connectors, allowing the connection of balanced input signals. Every channel is fitted with a separate gain control potentiometer and for every two input connectors is a Stereo / Bridge & Parallel switch provided whereby two channels can be bridged or linked in parallel, avoiding a cable clutter when multiple channels should be fed with the same input signal. The output connections are performed with 4-pin Euro-Terminal block connectors allowing connections for separate or bridged output channels.

A built-in multipurpose protection circuit protects against DC malfunction, short circuit, overheating, overload, and limits the signal when necessary.

This all is housed in a double rack space, steel 19" rack mount housing.

► Specifications

SYSTEM SPECIFICATIONS	
RMS Power @ 4 Ohm Stereo	16 x 60 Watt
RMS Power @ 8 Ohm Stereo	16 x 30 Watt
RMS Power @ 8 Ohm Bridge	8 x 120 Watt
Frequency response	20 Hz - 20 kHz
Signal to noise ratio	> 100 dB
T.H.D at 1 kHz	Less than 0.1% (1/2 rated power)
Technology	Class-D
Power supply	Switching mode
Power supply range	100-240 V AC / 50-60 Hz
Input Sensitivity	-20 dB ~ +20 dB
Protection	DC short circuit Overheat Over load Signal limiting
Operating temperature	0° ~ 40° at 95% Humidity
PRODUCT FEATURES	
Dimensions (Width x Height x Depth)	482 x 88 x 322 mm
Weight net	xxx Kg
Mounting	19"
Unit height	2 HE
Construction	Steel
Connectors	Input 3-Pin Euro Terminal Block (3.81 mm) Output 4-Pin Euro Terminal Block (5.08 mm)
Colour	Black
SHIPPING & ORDERING	
Packaging	Carton box
Shipping weight and volume	xxx Kg - xxx Cbm
*AUDAC reserves the right to change specifications without notice: this is part of our policy to continually improve our products	